

MO-114DN / MO-104DN

JUKI

You can sew both stretchy and knit fabrics with ease.



**LED LIGHT
INCLUDED**

MO-114DN

MO-104DN

* 2-Thread overcasting is optional.

2-Needle, 2/3/4 Thread Overlock with Automatic Rolled Hemming and Differential Feed

Various stitches enhance your sewing enjoyment



4-Thread Overlock



3-Thread Overlock



3-Thread Rolled
Hem



3-Thread Narrow
Overlock



Frill 3-Thread Rolled
Hem With Diff Feed


Lay-in Type Thread Tension Slots

throughout the machine make threading easy and efficient. No wrapping, just follow the color coded thread path.




Lower Looper Threader

allows for easy threading in seconds. Just slide the thread into the slot and snap the looper into place. (MO-114DN only)

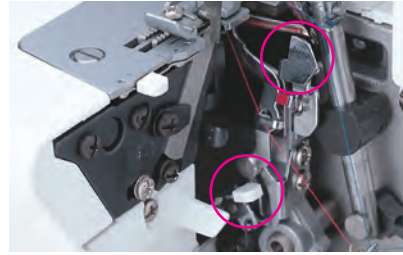


Automatic Rolled Hemming

can be created quickly and easily with built-in fingertip control. There is no need to change the throat plate or foot.

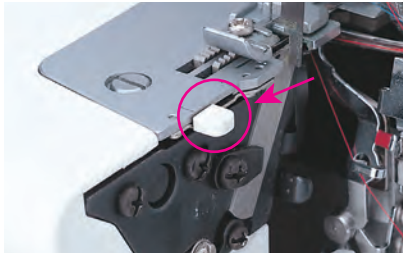

Cutting Width

can be adjusted quickly for perfect seams and rolled edges.

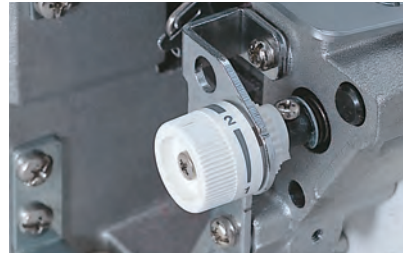

Adjustable Stitch Length

by simply turning dial located on the exterior right hand side within the range of 1 to 4mm. (MO-114DN). For MO-104DN, the knob is located inside the machine.



Differential Feed

is easily controlled and adjusted by a dial located on the exterior right hand side. (MO-114DN). For MO-104DN, the dial is located on the exterior left hand side.



MO-114DN

MO-104DN

Standard Specifications

MO-114DN / MO-104DN

Number of Threads	2 / 3 / 4 Threads
Needle	Schmetz 130 / 705H Nm 70, 80, 90
Standard Overlock Width	Left Needle: 5-7mm
	Right Needle: 3-5mm
	Rolled Hem: 1.8-2.2mm
Stitch Length	1-4mm (Standard: 2.5mm)
Differential Feed	0.7-2.0 Ratio
Presser Foot Lift	5mm / 7.5mm
Sewing Speed	Maximum 1,500spm

Other Features

- Adjustable presser foot pressure
- Upper looper converter (option for MO-104DN)

Optional Attachments



Blind Stitch Presser Foot




Universal Blind Stitch Presser Foot



Elasticator Presser Foot




Cording Presser Foot



Beading Presser Foot



Curved Beading Presser Foot



Piping Presser Foot



Gathering Presser Foot

JUKI

JUKI CORPORATION

2-11-1, TSURUMAKI, TAMA-SHI, TOKYO
206-8551, JAPAN
<https://www.juki.co.jp>

JUKI ECO PRODUCTS



This is an eco-friendly product which complies JUKI ECO PRODUCTS standards for protecting the environment.

●The sewing machine complies with the "JUKI Group Green Procurement Guidelines" on the use of hazardous substances, which is stricter than other restrictions, such as those of the RoHS Directive.

For details of JUKI PRODUCTS, refer to:
http://www.juki.co.jp/eco_e/index.html

*The RoHS Directive is an EU Directive limiting the use of 6 hazardous substances (lead, hexavalent chromium, mercury, cadmium, PBB and PBDE) in electrical and electronic equipment. The Juki Green Procurement Guideline is the voluntarily established criteria to eliminate not only the aforementioned six substances, but also other ones which also adversely affect the environment.

JUKI CORPORATION holds the rights to change technical specifications without prior notice. 2104(CW)